

## **Datasheet: Interior panels.**

**Product:** Perforated. Fire Retardant Acoustic panel:

**Developed for residential, commercial and public buildings, inside:**

### **Applications:**

- Music rooms, concert hall, theater, hotels, restaurant, museums.
- Offices buildings, shopping center, schools, fitness center/dressing rooms.
- Home office, bedroom, living room.

**Model:** Perforated. Fire Retardant acoustic panel. B-s1,d0:

### **Mesaure:**

- 12x600x600mm. =0,35m<sup>2</sup>
- 12x600x1200mm. =0,72m<sup>2</sup>
- 12x600x2400mm. =1,44m<sup>2</sup>

### **Weight & tolerance:**

- 12,8kg. Pr. M2
- perpendicularity +/- 2mm
- Thickness +/- 1mm
- Weight +/- 10%

### **Environment & Sustainability:**

- Fully recyclable plywood

**InEx Solution Aps.**  
Århusvej 10.  
8670 Låsby. Denmark.  
CVR-nr. 45120147  
TLF: 0045 92900590.  
Mail: [info@inexsolution.com](mailto:info@inexsolution.com)



**Reaction to fire:** According to EN 13501/ 13823-1

- B-s1,d0

**Fire retardant plywood**

- 12mm fire Retardant plywood

**Veneer surface:**

- Alpi-oak with mat fire varnish.


**Mounting screw:**

- Screw 4.0x30mm.

**Cleaning:**

- May be cleaned using a soft brush, by vacuum cleaning or by wiping with a damp cloth or sponge

**InEx Solution Aps.**  
Århusvej 10.  
8670 Låsby. Denmark.  
CVR-nr. 45120147  
TLF: 0045 92900590.  
Mail: [info@inexsolution.com](mailto:info@inexsolution.com)

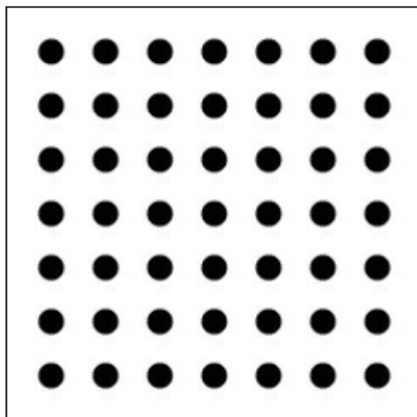

Measure 600x600x12mm

Ø8mm. holes

CC. 16mm

Opening degree 20%

Degree of opening/degree at hole size from ø6mm to ø25mm.

### Perforeringsgrad

	ø6	ø8	ø10	ø12	ø16	ø20	ø25
CC16	11,40%	19,95%	31,05%	44,53%	-	-	-
CC32	-	5,15%	7,98%	11,49%	20,26%	31,41%	48,60%

**InEx Solution Aps.**

Århusvej 10.

8670 Låsby. Denmark.

CVR-nr. 45120147

TLF: 0045 92900590.

Mail: [info@inexsolution.com](mailto:info@inexsolution.com)